


# GLOSSARY OF COMMONLY USED STEEL BUILDING TERMS

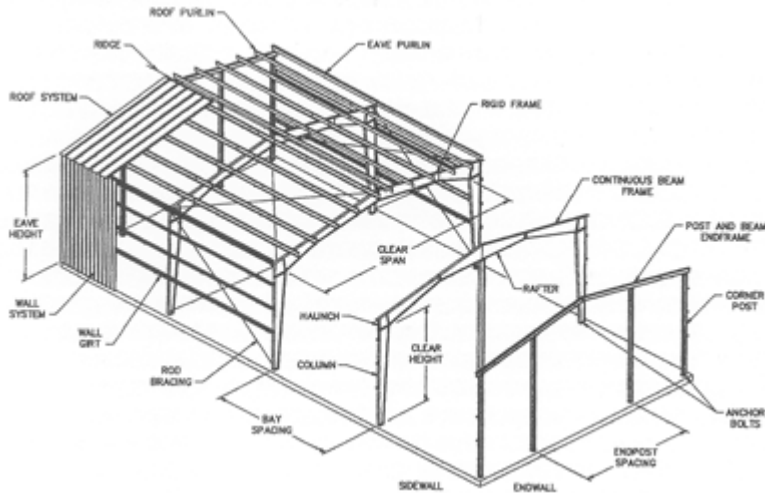

## **ANCHOR BOLTS**

Bolts used to secure building components to the foundation. In the case of primary framing, these bolts are embedded in the foundation and secured to the column baseplate.

## **BAY SPACING**

The distance between primary framing members measured parallel to the ridge or eave. Interior bays are measured from center line of frame to center line of frame.

## **CLEAR HEIGHT**

Distance from the finished floor to the bottom of the rafter at the rafter-to-column connection.

## **CLEAR SPAN**

Distance between columns.

## **COLUMN**

Vertical support member for primary framing system.

## **CONTINUOUS BEAM ENDFRAME**

A multiple-span structural frame consisting of straight or tapered solid-web sections whose exterior rafter-to-column moment connection stabilizes the frame. The frame spans across the width of the building, using interior columns and supporting secondary framing along with roof and wall coverings. This frame is designed in accordance with AISC Type I construction.

## **CORNER POST**

Corner column of post-and-beam frame.

## **EAVE HEIGHT**

The vertical dimension from finished floor to eave.

## **EAVE PURLIN**

A roof secondary framing member located at the eave and used for attaching roof and wall panels.

## **END POST SPACING**

Distance between center lines of end posts.

**ENDWALL**

An exterior wall that is perpendicular to the ridge and parallel to the gable of the building.

**EXTERIOR BAYS**

Last frame spacing on either end of the building measured from the building line (outside face of girt) to the center line of the first interior frame.

**HAUNCH**

The area of increased depth of the column or rafter member which is designed to account for the higher bending moments that occur at such places. Typically, this occurs at the rafter-to-column connection.

**POST-AND-BEAM ENDFRAME**

A structural framing system used at the endwall which is composed of corner post, end post, and rake beams.

**RAFTER**

A fabricated member, with parallel flanges, that extends from the haunch member to the frame ridge. Any beam, in general, used in a primary frame.

**RIDGE**

Apex of building.

**RIGID FRAME**

A clear-span structural frame consisting of straight or tapered sections whose rafter-to-column connection stabilizes the frame with respect to imposed loads. This frame is designed in accordance with AISC Type I construction.

**ROD BRACING**

Rods are used in conjunction with purlins and girts to form a truss-type bracing system located in both roof and wall planes.

**ROOF PURLIN**

A roof secondary member that is secured to frame rafters and supports the roof covering.

**ROOF SYSTEM**

The exterior roof surface consisting of panels, closures, and attachments.

**SIDEWALL**

An exterior wall that is parallel to the ridge and sidewall of the building.

**WALL GIRT**

A horizontal wall secondary member that is secured to columns and supports the wall covering.

**WALL SYSTEM**

The exterior wall surface consisting of panels, closures, and attachments.

Provided courtesy of:

**Bellwether Construction Co., Inc.**

PO Box 615

Horsham, PA 19044

P: 215-675-0926

F: 215-675-4462

E: [Sales@BellwetherConstruction.com](mailto:Sales@BellwetherConstruction.com)