

VP ROOF SYSTEMS

STYLE

PANEL RIB ROOF

FEATURES

THE MOST ECONOMICAL CHOICE FOR A GOOD LOOKING, HIGH-QUALITY AND LOW MAINTENANCE METAL ROOF



- Roof slope as low as ½" in 12"
- Fast installation with fast-drilling, color-matched fasteners
- Fewer endlaps and sidelaps for increased weathertightness
- UL 60 and UL 90 wind uplift ratings available

Panel Rib Roof has a reputation as an economical, quality roof. Built-up and single ply membrane roofs cannot match the economy and integrity of this VP roof system.



PANEL RIB ROOF PANELS OFFER ENHANCED ROOF INTEGRITY AND QUICKER INSTALLATION

PANEL RIB ROOF

If you are on a tight budget, but still need an attractive, high-quality, low-maintenance roof, VP's Panel Rib Roof offers the best combination of economy and durability.

Panel Rib Roof panels are standard in 26 gauge with 24 gauge and 22 gauge options. The steel panel is 36" wide with 1 ¼"-high ribs and is available in lengths up to 41'. The panel includes a purlin bearing edge (PBE) for superior strength and rigidity. Additionally, a narrow ridge (anti-capillary bead) runs the length of each sidelap for increased weathertightness.

The panels are attached with self-drilling, color-matched fasteners. Installation is fast since no field seaming is required. In addition, the panel's wide module and long length minimizes sidelaps and endlaps which increases both installation speed and improves weathertightness. Sealant is applied to every metal-to-metal contact point, resulting in a weather-resistant roof. Roof slope can be as low as ½:12.

Panel Rib Roof can accommodate up to 6 inches of fiberglass blanket insulation for high levels of energy efficiency.

All gauges of Panel Rib Roof are available with standard Galvalume finish. All gauges of Panel Rib are available in thirteen (13) standard colors with KXL finishes or four (4) color choices with SP finishes as well as a variety of custom colors. The KXL paint system is a PVDF finish applied to the Galvalume surface to give a long-life color that resists fading and chalking. KXL is a 1 mil nom. PVDF finish with a 70% Kynar 500 or Hylar 5000 standard.

Panel Rib Roof will meet the requirements for UL Class 60 or UL Class 90 wind uplift. VP meets the highest standards and certifications in the industry, including AISC and Miami-Dade County, Florida Product Approved:

NOA #02-0123.08 expires 03/07/2007


NOA #02-0417.01 expires 07/01/2007

For information about this or any other VP product or service, contact your local authorized VP Builder.



FEATURES

- Economical
- Roof slopes as low as ½" in 12"
- 36" coverage
- Lengths up to 41'-0"
- UL 60 and UL 90 wind uplift ratings available
- Dade County Product Approval
- Purlin bearings edge improves erectability

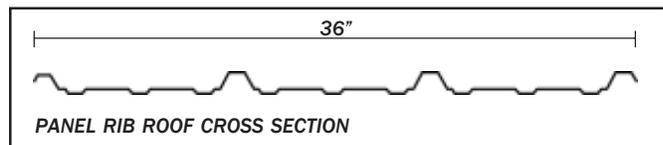

NOTE: ALL PANELS FORMED FROM LIGHT GAUGE METAL MAY EXHIBIT WAVINESS, ALSO KNOWN AS "OIL CANNING," COMMONLY OCCURRING IN, BUT NOT RESTRICTED TO, FLAT PORTIONS OF A PANEL. THIS INHERENT CHARACTERISTIC IS NOT A DEFECT OF MATERIAL OR MANUFACTURING AND IS NOT CAUSE FOR REJECTION.



The Ultimate Building Solution
VP Buildings
3200 Players Club Circle
Memphis, TN 38125
1-800-238-3246 • www.vp.com
2062 Revised 1/06

